


## Ethernet/USB/SD Card Module

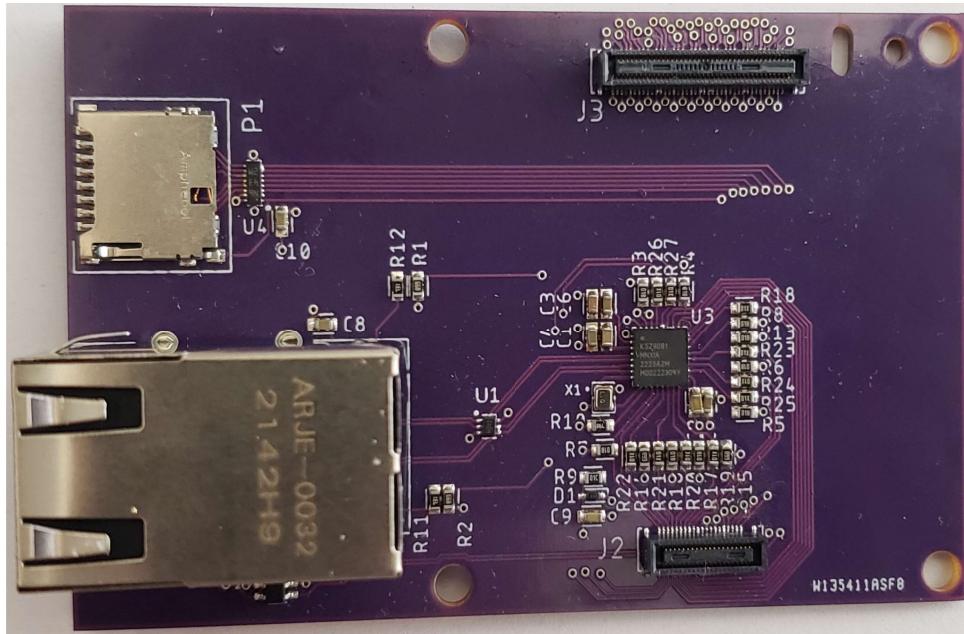

Ethernet Controller	10/100 Base-T, Shielded MII Interface 25 MHz Crystal
Ethernet Indicators	Link LED & Activity LED
Cable Detection	HP Auto MDI/MDI-X detection of straight-through and crossover cable connections with disable/enable option.
Auto-negotiation	Auto-negotiation automatically selects the highest link speed (10/100 Mbps) and duplex (half/full)
USB Interface	USB 2.0 Type A
SD Interface	microSD, 4-wire Push-Pull
HEMO Research Bus Interfaces	High-Speed Bus Input Low-Speed Bus Input Low-Speed Bus Output
Operating Temperature	-30° C to +85° C
Physical Dimensions	3.2" x 2.0"